


PAMG-XR1 5056 Aluminum Honeycomb

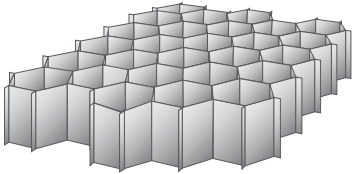

Description:

PAMG-XR1 5056 aerospace grade aluminum honeycomb is a lightweight core material which offers superior strength and corrosion resistance over 5052 and 3003 aluminum honeycomb. PAMG-XR1 5056 honeycomb is made from 5056 aluminum alloy foil and meets all the requirements of MIL-C-7438.

Applications:

PAMG-XR1 5056 honeycomb uses include aircraft floors, aircraft leading and trailing edges, missile wings, fan casings, fuel cells, fuselage components, helicopter rotor blades and navy bulkhead joiner panels. PAMG-XR1 5056 honeycomb is suitable for applications where materials conforming to MIL-C-7438 are required.

Features:

- Elevated use temperatures
- High thermal conductivity
- Flame resistant
- Excellent moisture and corrosion resistance
- Fungi resistant
- Low weight / High strength

Availability:


PAMG-XR1 5056 honeycomb is available in four forms: unexpanded blocks, unexpanded slices, untrimmed expanded sheets and cut to size expanded sheets. It is also available with or without cell perforations to facilitate cell venting for certain applications.

Cell Sizes:	1/8" - 3/8"
Densities:	1.0 pcf - 8.1 pcf
Sheet "Ribbon" (L):	48" typical
Sheet "Transverse" (W):	96" typical
Tolerances:	Length: + 6", - 0" Width: + 6", - 0" Thickness: ± .005" (under 4" thick) Density: ± 10% Cell Size: ± 10%

NOTE: Special dimensions, sizes, tolerances, CNC machining and die cut to size can be provided upon request.

PAMG-XR1 5056 honeycomb is specified as follows:

Material - Density - Cell Size - Foil Thickness - Perforated - Alloy

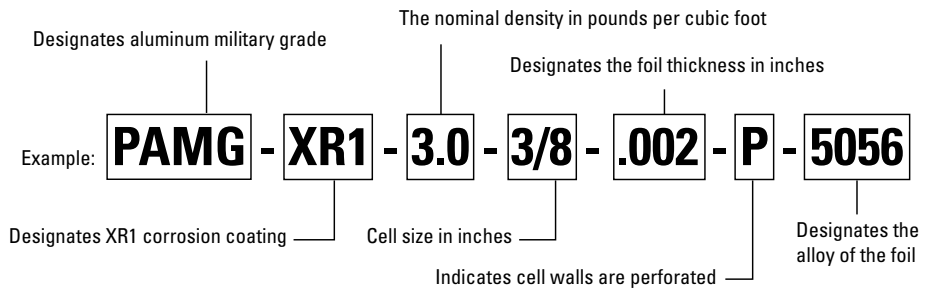

PAMG-XR1 5056 Mechanical Properties

PLASCORE® Honeycomb Designation			Bare Compressive		Plate Shear			
CELL SIZE	FOIL GAUGE	NOMINAL DENSITY PCF	STRENGTH PSI	MODULUS KSI	STRENGTH PSI		MODULUS KSI	
					"L"	"W"	"L"	"W"
1/8	.0007	3.1	340	97	250	155	45	20
1/8	.001	4.5	630	185	425	255	70	38
1/8	.0015	6.1	1000	295	640	370	102	38
1/8	.002	8.1	1520	435	900	520	143	51
3/16	.0007	2.0	155	45	140	85	27	13
3/16	.001	3.1	340	97	255	155	45	20
3/16	.0015	4.4	600	180	410	245	68	27
3/16	.002	5.7	910	270	585	340	94	36
1/4	.0007	1.6	100	30	90	60	20	12
1/4	.001	2.3	205	58	170	105	32	15
1/4	.0015	3.4	395	115	290	175	50	22
1/4	.002	4.3	580	172	400	240	67	27
1/4	.0025	5.2	790	230	500	300	84	32
3/8	.0007	1.0	35	15	60	35	15	9
3/8	.001	1.6	100	30	90	60	20	12
3/8	.0015	2.3	205	58	170	105	32	15
3/8	.002	3.0	320	92	245	145	43	19

Tested at 0.625" per MIL-C-7438 at room temperature.

Plascore, Inc., employs a quality management system that is AS/EN/JISQ 9100, ISO 9001:2008 and ISO 14001:2004 certified.

IMPORTANT NOTICE: The information contained in these materials regarding Plascore's products, processes, or equipment, is intended to be up to date, accurate, and complete. However, Plascore cannot warrant that this is always the case. Accordingly, it is a purchaser's or user's responsibility to perform sufficient testing and evaluation to determine the suitability of Plascore's products for a particular purpose. Information in these materials and product specifications does not constitute an offer to sell. Your submission of an order to Plascore constitutes an offer to purchase which, if accepted by Plascore, shall be subject to Plascore's terms and conditions of sale. **PLASCORE MAKES NO WARRANTIES OF ANY KIND REGARDING THESE MATERIALS OR INFORMATION, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.** Plascore owns and shall retain all worldwide rights in its intellectual property, and any other trademarks used in these materials are the property of their respective owners. The information in these materials shall not be construed as an inducement, permission, or recommendation to infringe any patent or other intellectual property rights of any third parties.



Corporate Headquarters

Plascore Incorporated
615 N. Fairview St.
Zeeland, MI 49464-0170

Phone (616) 772-1220
Toll Free (800) 630-9257
Fax (616) 772-1289
Email sales@plascore.com
Web www.plascore.com

Europe

Plascore GmbH&CoKG
Feldborn 6
D-55444 Waldlaubersheim
Germany

Phone +49(0) 6707-9143 13
Fax +49(0) 6707-9143 40
Email sales.europe@plascore.com
Web www.plascore.de