


SSH-301 & SSH-304 Stainless Steel Honeycomb

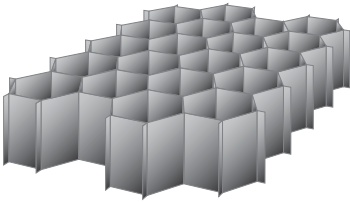

Description:

SSH-301 and SSH-304 stainless steel honeycomb is adhesively-bonded which offers affordable pricing when compared against conventional welded stainless cores. SSH-304 honeycomb is made from annealed SS304.

Applications:

Stainless steel honeycomb uses include joiner panels, bulkheads, train doors and floors or any areas where honeycomb is subjected to hostile environments.

Features:

- Excellent moisture and corrosion resistance
- Flame resistance
- Fungi resistance

Availability:


Stainless steel honeycomb is available in expanded, untrimmed sheets.

Cell Sizes:	3/8" - 1/2"
Densities:	5.3 pcf - 7.1 pcf
Sheet "Ribbon" (L):	48" typical
Sheet "Transverse" (W):	96" typical
Tolerances:	Length: + 6", - 0" Width: + 6", - 0" Thickness: ± .015" (under 4" thick) Density: ± 15% Cell Size: ± 15%

NOTE: Special sizes and can be provided upon request.

SSH-301 & SSH-304 honeycomb is specified as follows:

Material - Density - Cell Size - Foil Thickness - Non-perforated - Alloy

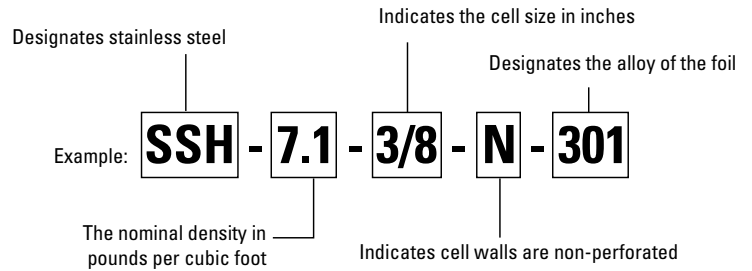

SSH-301 & SSH-304 Mechanical Properties*

PLASCORE® Honeycomb Designation			Bare Compressive		Plate Shear "L" Direction			Plate Shear "W" Direction		
CORE TYPE	CELL SIZE	DENSITY	STRENGTH PSI		STRENGTH PSI		MODULUS KSI	STRENGTH PSI		MODULUS KSI
			TYP	MIN	TYP	MIN		TYP	MIN	
SSH-301	3/8	7.1	350	245	290	203	112	150	116	60
SSH-301	1/2	5.3	239	167	196	137	81	109	84	45
SSH-304	3/8	7.1	214	150	207	145	77	110	77	43
SSH-304	1/2	5.3	145	102	140	98	58	78	55	32

* Estimated or interpolated values based on limited testing per MIL-STD-401 at room temperature.

Note: The above data is based on variable sample sizes and is subject to change with continued manufacturing and testing of SSH honeycomb core blocks.

Plascore, Inc., employs a quality management system that is AS/EN/JISQ 9100, ISO 9001:2008 and ISO 14001:2004 certified.

IMPORTANT NOTICE: The information contained in these materials regarding Plascore's products, processes, or equipment, is intended to be up to date, accurate, and complete. However, Plascore cannot warrant that this is always the case. Accordingly, it is a purchaser's or user's responsibility to perform sufficient testing and evaluation to determine the suitability of Plascore's products for a particular purpose. Information in these materials and product specifications does not constitute an offer to sell. Your submission of an order to Plascore constitutes an offer to purchase which, if accepted by Plascore, shall be subject to Plascore's terms and conditions of sale. PLASCORE MAKES NO WARRANTIES OF ANY KIND REGARDING THESE MATERIALS OR INFORMATION, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Plascore owns and shall retain all worldwide rights in its intellectual property, and any other trademarks used in these materials are the property of their respective owners. The information in these materials shall not be construed as an inducement, permission, or recommendation to infringe any patent or other intellectual property rights of any third parties.



Corporate Headquarters

Plascore Incorporated
 615 N. Fairview St.
 Zeeland, MI 49464-0170
 Phone (616) 772-1220
 Toll Free (800) 630-9257
 Fax (616) 772-1289
 Email sales@plascore.com
 Web www.plascore.com

Europe

Plascore GmbH&CoKG
 Feldborn 6
 D-55444 Waldlaubersheim
 Germany
 Phone +49(0) 6707-9143 13
 Fax +49(0) 6707-9143 40
 Email sales.europe@plascore.com
 Web www.plascore.de